

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number
WO 2004/005172 A1

(51) International Patent Classification⁷: **B65H 19/26**,
19/28

(21) International Application Number:
PCT/IT2003/000416

(22) International Filing Date: 2 July 2003 (02.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
FI2002A000122 9 July 2002 (09.07.2002) IT

(71) Applicant (for all designated States except US): **FABIO PERINI S.P.A.** [IT/IT]; Zona Ind.le P.I.P. Mugnano Sud, I-55100 Lucca (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BIAGIOTTI, Guglielmo** [IT/IT]; Via di Vorno, 105, Capannori, I-55060 Lucca (IT). **GELLI, Mauro** [IT/IT]; Via del Marginone 24, Fraz. Pieve S. Paolo, Capannori, I-55066 Lucca (IT).

(74) Agents: **MANNUCCI, Michele** et al.; Uff. Tecn. Ing. A. Mannucci S.r.l., Via della Scala, 4, I-50123 Firenze (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **REWINDING MACHINE FOR PRODUCING LOGS OF WOUND WEB MATERIAL AND RELATIVE METHOD**

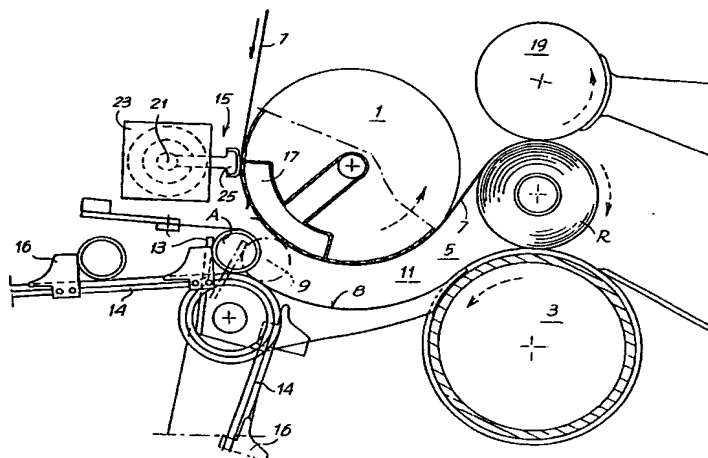

(57) **Abstract:** The rewinding machine comprises: a first winding roller (1); a second winding roller (3); a nip (5) defined between said first and said second winding roller, through which said web material (7) is fed; a roller surface, extending upstream of said nip in relation to the direction of feed of the web material and defining, with the first winding roller (1), a channel into which winding cores are fed, said channel having an inlet (9) and an outlet (11); a feeder (13) to feed winding cores into said channel; a severing device to sever the web material upon termination of winding a log. The severing device is disposed to operate on the web material in a position upstream of the inlet end of said channel, in relation to the direction of feed (f7) of the web material and the first winding roller has suction openings on its cylindrical surface. Moreover, between the position in which said severing device operates and the inlet of said channel a suction box (17) is provided inside said first winding roller.

- 1 -

REWINDING MACHINE FOR PRODUCING LOGS OF WOUND WEB
MATERIAL AND RELATIVE METHOD
DESCRIPTION

Technical field

- 5 The invention relates to a machine for forming rolls or logs of paper rolled on a tubular core in cardboard or the like. More specifically, the invention relates to a rewinding machine of the peripheral winding type, that is where a log of web material is formed in a winding cradle, in contact with the members that transmit rotary movement to the log being formed via friction on
10 the external surface of the log.

State of the art

 The invention also relates to a method for producing logs of wound web material.

- To produce rolls or logs of web material, for example in tissue paper to
15 produce small rolls of toilet tissue, kitchen towels or the like, rewinding machines are used in which a predetermined quantity of web material is wound around tubular cores generally made of cardboard. These logs are then cut into a plurality of small rolls to be sold.

- Winding machines are divided into two categories according to the
20 system they adopt to supply rotary movement to the cores.

 A first type of rewinding machine supplies the winding movement to the logs through a rotating support that is fitted inside the cores and made to rotate by a motor.

- A second type of rewinding machine, called peripheral or surface
25 rewinding machine, uses contact with the winding rollers which by rotating also determine rotation of the cores and their consequent winding movement. An example of this second type of rewinding machine is described in WO-A-9421545.

- In particular, for this second type of rewinding machine, the phase in
30 which the material between one log and the next is severed and a new log starts to be formed is particularly delicate; this involves dividing the web material to complete the preceding log and anchoring the initial edge to the new winding core.

 US-A-4,487,377 describes a system which cuts the web material with a

- 2 -

blade upstream of the point at which a new core is fed and uses a suction system to maintain the edge adhering to the winding roller until this is brought into contact with the surface of the core spread with glue to start the winding, which is fed directly into the nip between a first and second winding cylinder.

5 WO-A-9421545 describes a system provided with a duct or channel to feed the core into the rewinding machine. This path also constitutes a rolling surface for the core and inside this, between a new winding core being fed and a log being completed, a severing device acts to create tension on the material and cause it to tear along a perforated line between the formed log
10 and the new core.

Adhesion of the initial edge of the web material on the new core is guaranteed by glue applied to the surface of the core.

WO-A-00/68129 describes an analogous system to sever the web material and feed the new core into the winding zone. Adhesion on the new
15 tubular core of the initial edge of the web material created by tearing is obtained by suction through the tubular core. Two suction ducts acting on the two ends of the core are provided for this purpose; these follow the core along the feed path and maintain the edge of the material adhering to the core by suction through the holes provided on the surface of the core, thus starting to
20 wind the new log.

Objects and summary of the invention

The object of the present invention is to produce a rewinding machine to form logs of wound web material, equipped with a device that allows the paper to be torn in a reliable way, offering high flexibility, simplifying and
25 making it easier to feed new winding cores and reducing the number of mechanical parts in front of the nip between the winding rollers.

This and other objects and advantages, which shall become apparent to those skilled in the art by reading the text hereunder, are obtained in substance with an improved rewinding machine. This rewinding machine
30 comprises: a first and a second winding roller which between them form a nip through which the web material to be wound on the cores is fed; a channel, positioned upstream of the nip between the first winding roller and the second winding roller, into which the tubular cores are fed to start winding the web material on the cores, constituted by a rolling surface for the cores; a core

- 3 -

feed device to feed the cores into the inlet of the channel; a severing device to sever the web material at the end of winding a log and to form the initial edge of web material to start winding the subsequent log.

The severing device is disposed to operate on the web material in a position upstream of the inlet end of the channel into which the cores are fed, in relation to the direction of feed of the web material. Moreover, the surface of the first winding roller is provided with suction openings and between the position in which the severing device operates and the inlet to the channel a suction box is provided inside the first winding roller. This allows the initial and final edges of the web material produced by severing or tearing performed by the severing device to be held via the suction openings on the first winding roller to transfer the initial edge to a new core being fed into said channel.

Advantageously, the first winding roller may have a cylindrical surface with annular bands with a high friction coefficient and annular bands with a low friction coefficient; the severing device has a plurality of pressers positioned in relation to the first winding roller so that they press against it at the bands with a low friction coefficient.

In this way the severing device acts against the surface of the first winding roller to pinch the web material against it; the speed of the device is different and in particular lower than the peripheral speed of the roller and this causes tearing of the web material – which slips on the portions of smooth surface of the winding roller – downstream of the point in which the severing device acts.

As the web material is torn at one of the perforation lines produced on the material and which divide it into individual detachable portions, depending on the reciprocal distance between the perforation lines tearing may be performed in a position that is also upstream of the core around which the material is to be wound. It is thus necessary for the free end formed in this way to reach the core even if it is no longer under the tension of the web material preceding it. According to the invention the suction openings on the cylindrical surface of the first winding roller and the suction sector inside this roller are provide for this purpose. Although the web material is torn it does not cease to adhere to the first winding roller as it undergoes the suction action of on the portion of the roller inside which the suction sector is located.

In this way the roller conveys the end of the web material to the point in which it comes into contact with a new core fed by the feed device. At this point winding of the web material onto the core commences with the suction action simultaneously stopping, as the end has moved beyond the suction portion of the roller.

5 The presence of the suction system is advantageous even if the machine processes materials in which the distance between the perforation lines causes tearing to occur downstream of the core insertion point, that is downstream of the point in which the core comes into contact with the web material driven around the winding roller. In this case, in fact, in the absence of suction on the surface of the roller synchronism between the severing action of the web material and feed of the winding core is extremely critical. In the absence of precise synchronization there is the risk that the new core will not pick up the initial free edge of the web material, causing the machine to stop. Suction on the surface of the winding roller makes it possible to guarantee correct transfer of the initial free edge to the new core even if movements are not perfectly synchronized.

10 Initial winding may be favored with methods known in the art. In particular, glues may be applied to the surface of the core in lines, rings or the like. When gluing takes place along a line parallel to the axis of the tubular core, it is advantageous for the core to be fed into the rewinding machine with an angular position that allows the core to accelerate angularly before the line of glue comes into contact with the web material.

25 Once the end of the web material has been anchored to the core, the first phase of the procedure to form the new log has commenced. At this point the log travels along the rolling surface at the end of which the first phase to form the log is completed. This surface may also be very limited in length. The procedure continues with completion of winding of the web material until reaching the desired final diameter. This completion takes place according to known methods such as those described in WO-A-9421545.

30 With a rewinding machine of the type described above a method for producing logs of web material as defined in claim 7 may be implemented.

Further advantageous characteristics and embodiments of the invention are indicated in the dependent claims.

Brief description of the drawings

The invention shall now be better understood by following the description and attached drawing, which shows a non-limiting practical example of the finding, in which:

5 Figure 1 shows a view of the rewinding machine according to the invention; and

 Figures 2-4 show a sequence of the operation of the rewinding machine.

Detailed description of the preferred embodiment of the invention

10 The rewinding machine according to the invention comprises a first winding roller 1; a second winding roller 3; a nip 5 defined between the two winding rollers, through which the web material 7 is fed; a rolling surface 8, which extends upstream of the nip 5 in relation to the direction of feed of the web material 7.

15 Defined between the first winding roller 1 and the rolling surface 8 is a channel for feeding the winding cores A. This channel has an inlet 9 and an outlet 11. Its dimension in height, that is the distance between the rolling surface 8 and the cylindrical surface of the roller 1, is more or less equal or slightly smaller than the diameter of the winding cores, which when inside the
20 channel are in contact with both of these elements.

 Also provided is a feeder 13 to feed the winding cores A into the channel. In the example shown, these are fed by a conveyor 14 along which pushers 16 are disposed. The conveyor 14 may pass through, in a per se known way, a glue dispenser to apply a glue to the surface of the cores A.

25 Upstream (in relation to the direction of feed of the web material) of the inlet end of the channel defined between the surface 8 and the roller 1 a severing device 15 is positioned to sever the web material 7 at the end of winding a log. Moreover, a third winding roller 19 with a movable axis is provided to complete winding the log in cooperation with the first and second
30 winding roller 1 and 3.

 As can be seen in Figure 1, when the log R is completely formed the severing device 15 acts upstream of the inlet 9 of the feed channel. This severing device 15 rotates around an axis 21 moved by a motor 23 with a variable speed controlled by a programmable control unit, not shown, to act

synchronously with the other elements of the machine.

The first winding roller 1 has a cylindrical surface with annular bands with a high friction coefficient alternated with annular bands with a low friction coefficient. The severing device 15 has a plurality of pressers 25 aligned parallel to the axis of rotation 21 and positioned in relation to the first winding roller 1 so that they press against it at the bands with a low friction coefficient.

The peripheral speed of the pads or pressers 25 of the severing device 15 is lower than the feed speed of the web material 7 and of the winding roller 1. Therefore, when the web material 7 is pinched between the winding roller 1 and the pads 25, the action of the severing device 15 tears the web material in a point between the pressure line of the pads 25 and the completed log, being unloaded from the winding cradle formed by the winding rollers 1, 3, 19. More specifically, tearing occurs along a perforation line, produced on the web material by a perforator unit, not shown.

The first winding roller 1 has suction openings on its cylindrical surface; a suction box 17 is provided inside the roller 1 between the position in which the severing device 15 operates and the inlet 9 to the core feed channel; this box remains in a fixed position during rotation of the roller. The suction produced on the surface of the roller 1 causes the initial and final edges of the web material produced by tearing to adhere to the first roller 1.

The feed device 13 pushes a new core A to the inlet 9 of the feed channel. Synchronism between the severing device 15 and the action of the feed device 13 makes the core A rest against the surface of the first roller 1 at the inlet 9 of the feed channel when the final edge and the initial edge of the web material obtained by tearing have already moved beyond the inlet 9 of the channel defined by the rolling surface 8. The initial edge of the new log ceases to adhere to the first roller 1 when it moves beyond the zone of action of the suction sector 17 and consequently adheres to the core. A glue is applied to the core to hold the web material in order to start forming a new log. Alternatively other arrangements may be used to cause winding to commence. For example, the core may be provided with suction, or electrostatically charged, or yet again nozzles may be provided to redirect the initial edge of the web material so that it clings to the new core to form a first turn of the winding.

- 7 -

Driven by contact with the first winding roller 1 and with the rolling surface 8, the new core A with the web material that starts to wind around it travels along the feed channel rolling on the surface 8 at a speed that is half the peripheral speed of the first winding roller 1. Upon reaching the outlet 11 it
5 travels through the nip 5 and enters the actual winding cradle, formed by the winding rollers 1, 3, 19 and where winding of the log is completed.

Once forming of the log has been completed the severing device 15 acts again to allow the log R to continue along the production line.

The aforesaid process to sever the web material, feed the new core, attach the initial free edge to the new core, form the log and unload the log
10 from the winding cradle is schematically represented in the sequence in Figures 2 to 4.

Unloading of the log from the winding cradle is performed in a per se known way, for example by temporarily modifying the rotation speed of the winding rollers, in particular by reducing the speed of the winding roller 3
15 and/or increasing the speed of the winding roller 19.

Upstream of the severing device 15 a system may be provided to take up the slack in the web material caused by the effect of the device. A suction roller, a cylinder with a high friction coefficient, a suction box, an oscillating bar
20 or any other suitable means may be used for this purpose.

Suction through the suction openings on the cylindrical shell of the winding roller 1 may be produced via a fan that may be made to operate constantly, providing a cutoff system on the suction line from the suction box 17 to the fan, to activate suction only when requested, that is during the phase
25 to replace a completed log with a new tubular winding core A.

It is understood that the drawing purely shows a non-limiting practical embodiment of the invention, the forms and arrangements of which may vary without however departing from the scope of the concept underlying the invention. Any reference numerals in the attached claims are provided purely
30 to facilitate reading in the light of the description hereinbefore and of the attached drawings and do not limit the scope of protection whatsoever.

- 8 -

Claims

1. A rewinding machine to form logs of wound web material, comprising:

- a first winding roller (1);
- 5 • a second winding roller (3);
- a nip (5) defined between said first and said second winding roller, through which said web material is fed (7);
- a rolling surface, extending upstream of said nip in relation to the direction of feed of the web material and defining, with the first winding roller (1), a
- 10 channel into which winding cores are fed, said channel having an inlet (9) and an outlet (11);
- a feeder (13) to feed winding cores into said channel;
- a severing device (15) to sever the web material upon termination of winding a log;
- 15 characterized in that: said severing device is disposed to operate on the web material in a position upstream of the inlet end of said channel, in relation to the direction of feed (f7) of the web material; said first winding roller has suction openings on its cylindrical surface; and between the position in which said severing device operates and the inlet of said channel a suction box (17)
- 20 is provided inside said first winding roller, initial and final edges of the web material produced by severing performed by the severing device being held via the suction openings on said first winding roller to transfer the initial edge to a new core being fed into said channel.

2. Rewinding machine as claimed in claim 1, characterized in that

25 said severing device (15) acts against the surface of the first winding roller (1) to pinch the web material (7) against said first winding roller (1), the severing device having a different feed speed to the peripheral speed of the first winding roller during contact with the web material.

3. Rewinding machine as claimed in claim 2, characterized in that

30 the severing device (15) has a lower feed speed than the peripheral speed of the first winding roller during contact with the web material.

4. Rewinding machine as claimed in claim 2 or 3, characterized in that: said first winding roller (1) has a cylindrical surface with annular bands

- 9 -

with a high friction coefficient and annular bands with a low friction coefficient; said severing device has a plurality of pressers (25); and said pressers (25) are positioned in relation to said first winding roller so that they press against it at the bands with a low friction coefficient.

5 5. Rewinding machine as claimed in one or more of the previous claims, characterized in that said suction openings are distributed over the entire circumferential extension of said first winding roller (1).

 6. Rewinding machine as claimed in one or more of the previous claims, characterized in that said severing device (15) is provided with a rotary movement during action on the web material.

 7. Method for producing logs of wound web material, comprising the phases of:

- feeding the web material (7) along a feed path;
- arranging a first and a second winding roller (1, 3) defining between them a nip (5) through which to feed the web material (7);
- arranging a rolling surface extending upstream of said nip (5) in relation to the direction of feed (f7) of the web material along said path, said rolling surface and said first winding roller (1) defining a channel into which winding cores are fed, said channel having an inlet (9) and an outlet (11);
- winding a first log (R) around a first winding core (A);
- upon termination of winding said first log (R), severing the web material to create an initial edge and a final edge, feeding a new winding core (A), anchoring the initial edge to the new core and starting to wind a second log (R);

25 characterized in that:

- the initial edge and the final edge are temporarily held on the surface of the winding roller;
- said new core (A) is fed into said channel synchronously to the movement of the initial edge of the web material, so that the contact point between the new core and the web material driven around said first winding roller is upstream of the initial edge in relation to the direction of feed of the web material along said path.

 8. Method as claimed in claim 7, characterized in that the web

- 10 -

material (7) is severed upstream of the inlet (9) of said channel, in relation to the direction of feed (f7) of the web material along said path and is fed, continuing to adhere to the first winding roller (1), to a position downstream of the position in which said winding core is pressed against the first winding
5 roller.

9. Method as claimed in claim 7 or 8, characterized in that said initial edge and said final edge are held on the cylindrical surface of the first winding roller (1) by suction.

10. Method as claimed in claim 7, 8 or 9, characterized in that the
10 web material (7) is severed by pinching said web material with a severing device (15), said severing device (15) modifying the feed speed of the web material to cause it to tear.

11. Method as claimed in claim 10, characterized in that said
15 severing device (15) slows the web material to cause it to tear downstream of the contact point between it and the web material.

12. Method as claimed in claim 10 or 11, characterized in that said severing device (15) pinches the web material against the cylindrical surface of the first winding roller (1).

Fig.1

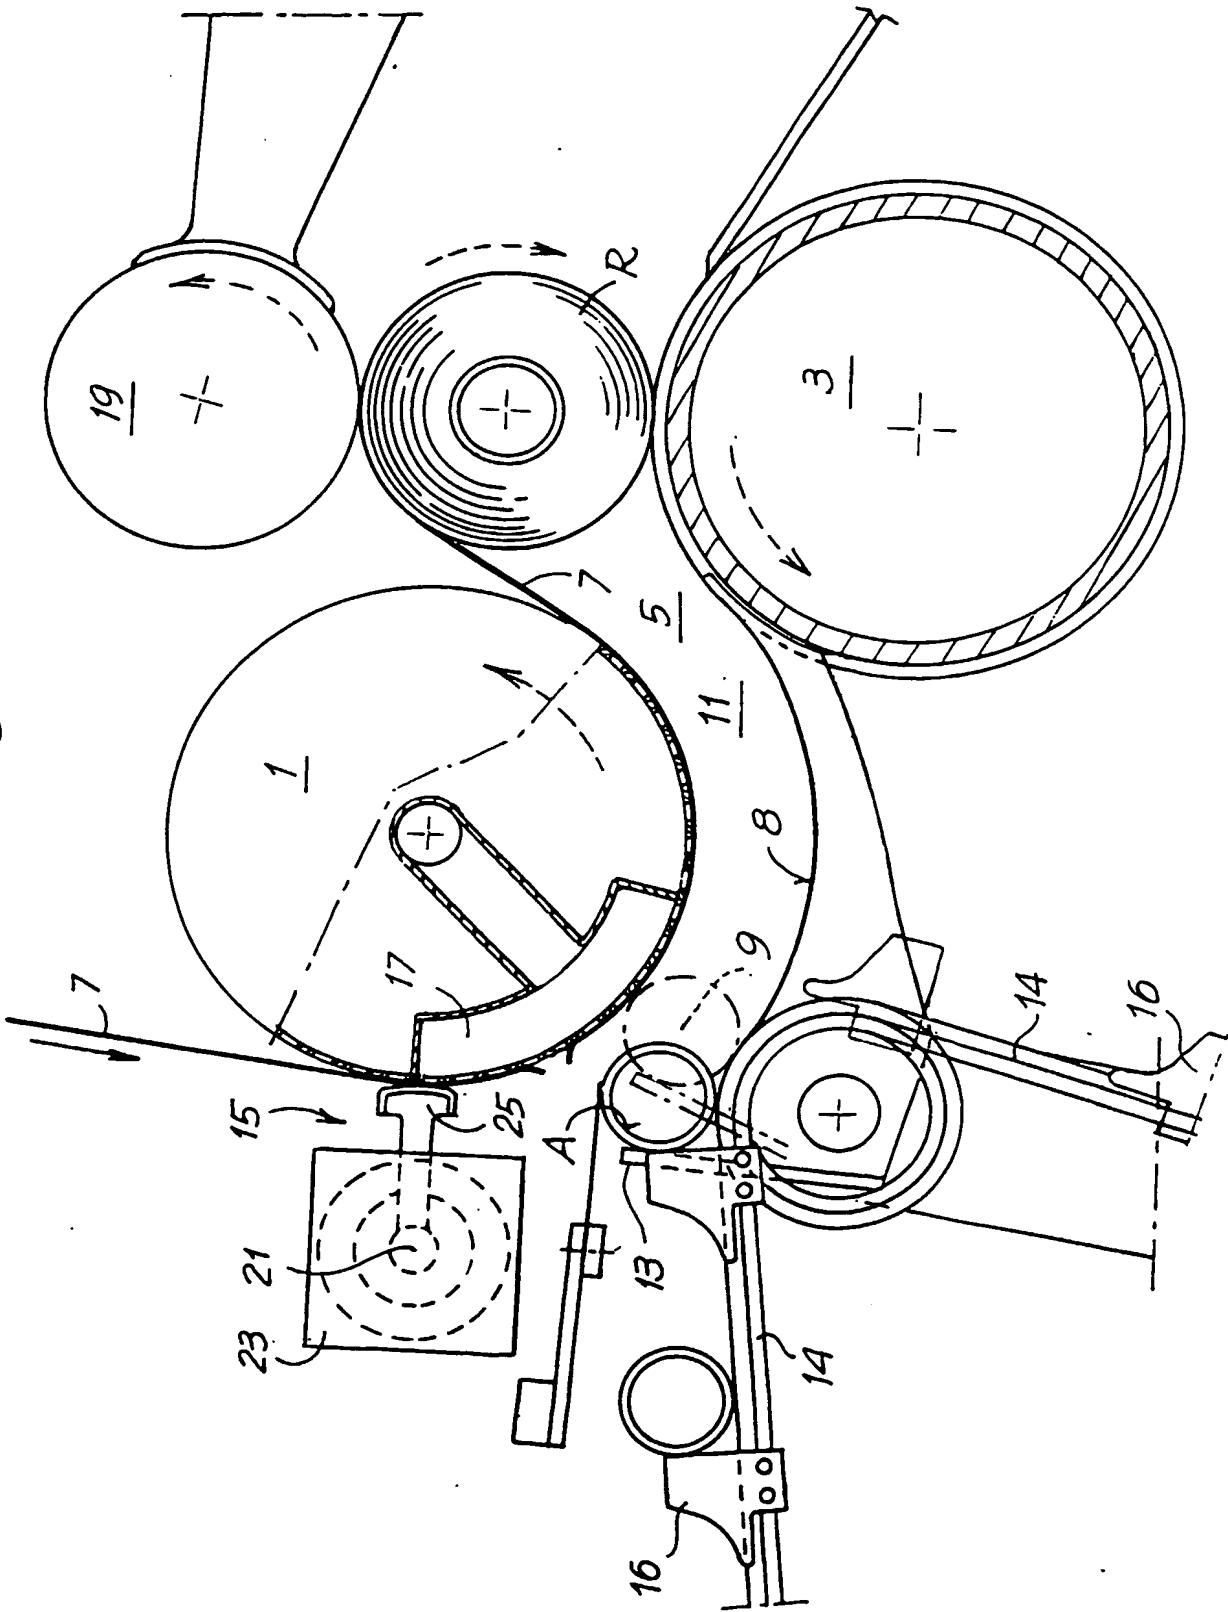


Fig.2



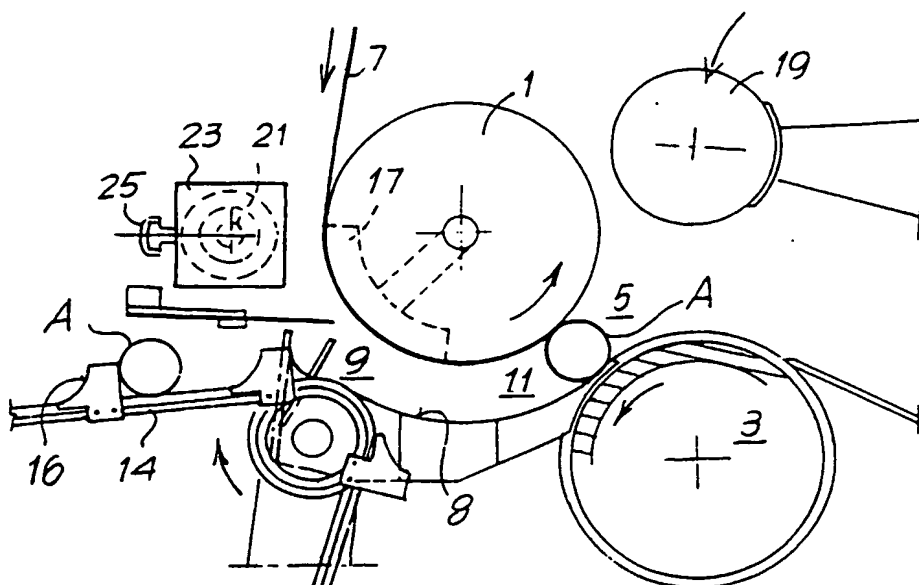


Fig.3

Fig.4

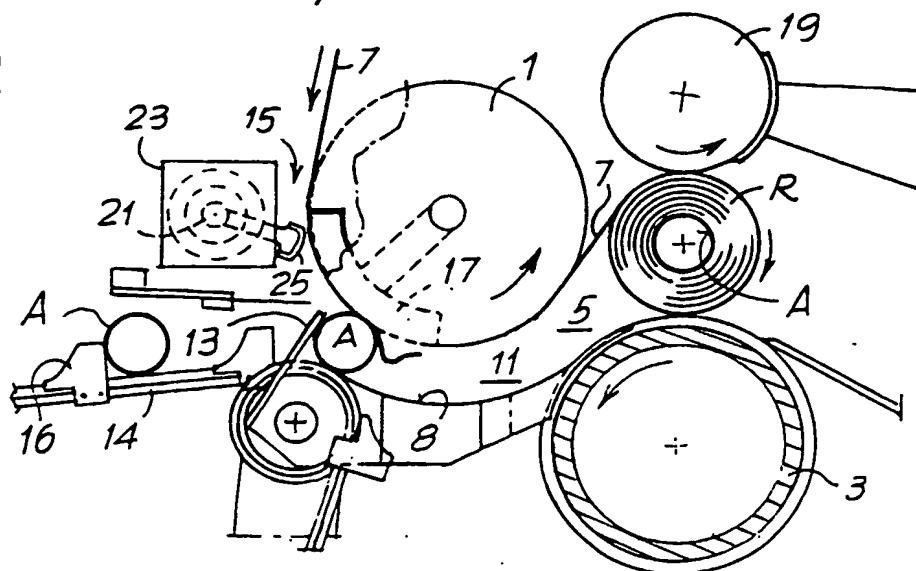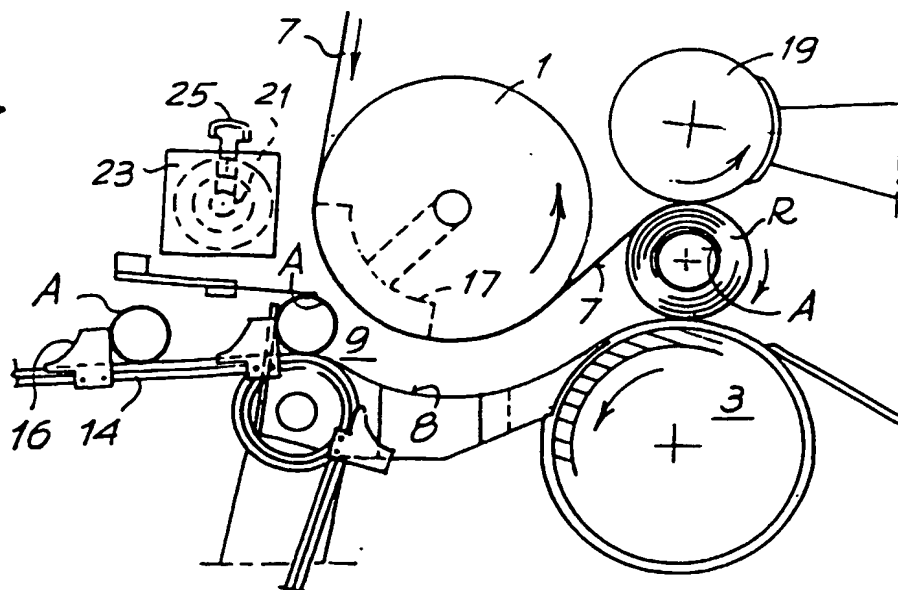

INTERNATIONAL SEARCH REPORT

International application No

PCT/IT 03/00416

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 B65H19/26 B65H19/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 B65H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 853 140 A (BIAGIOTTI GUGLIELMO) 29 December 1998 (1998-12-29)	1,5-9
A	column 4, line 35 -column 6, line 45; figures	2,10
Y	US 4 487 377 A (PERINI FABIO) 11 December 1984 (1984-12-11)	1,5-9
A	the whole document	2,10
A	US 4 909 452 A (BUXTON GERRY W ET AL) 20 March 1990 (1990-03-20)	1,7
	column 3, line 57 -column 5, line 16; figures	
A	EP 1 016 608 A (M T C MACCHINE TRASFORMAZIONE) 5 July 2000 (2000-07-05) paragraphs '0021!-'0040!; figures	1,7
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

20 October 2003

Date of mailing of the international search report

05/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Haaken, W

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IT 03/00416

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 335 869 A (YAMAGUCHI CHOTARO ET AL) 9 August 1994 (1994-08-09) column 4, line 57 -column 6, line 42; figures 2,5-7 -----	1,7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 03/00416

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5853140	A	29-12-1998	IT	FI950069 A1	14-10-1996
			AU	5345596 A	30-10-1996
			BR	9604798 A	17-02-1999
			CA	2218055 A1	17-10-1996
			CN	1181739 A , B	13-05-1998
			EP	0873272 A1	28-10-1998
			IL	117796 A	01-06-2000
			WO	9632350 A1	17-10-1996
			JP	11503397 T	26-03-1999
			KR	235839 B1	15-12-1999
			PL	322772 A1	16-02-1998
			RU	2128619 C1	10-04-1999
US 4487377	A	11-12-1984	IT	1167967 B	20-05-1987
			AT	380457 B	26-05-1986
			AT	183682 A	15-10-1985
			BR	8203209 A	17-05-1983
			CA	1192532 A1	27-08-1985
			DE	3217628 A1	10-03-1983
			ES	8308794 A1	16-12-1983
			GB	2105687 A , B	30-03-1983
			IL	66348 A	29-09-1985
			JP	1022186 B	25-04-1989
			JP	1657529 C	21-04-1992
			JP	58036846 A	03-03-1983
			JP	1081746 A	28-03-1989
			JP	1691889 C	27-08-1992
			JP	3057011 B	29-08-1991
			JP	1197258 A	08-08-1989
			KR	8601208 B1	27-08-1986
			NL	8202066 A , B ,	16-03-1983
			NL	9500626 A , B ,	01-08-1995
US 4909452	A	20-03-1990	US	4828195 A	09-05-1989
			AT	91999 T	15-08-1993
			AU	3076089 A	31-08-1989
			BR	8900915 A	24-10-1989
			CA	1308088 C	29-09-1992
			DE	68907749 D1	02-09-1993
			DE	68907749 T2	11-11-1993
			EP	0331378 A1	06-09-1989
			JP	1271341 A	30-10-1989
			JP	2015727 C	19-02-1996
			JP	6099061 B	07-12-1994
			MX	166324 B	23-12-1992
			ZA	8901491 A	29-11-1989
EP 1016608	A	05-07-2000	EP	1016608 A1	05-07-2000
			US	6494398 B1	17-12-2002
US 5335869	A	09-08-1994	JP	1879374 C	07-10-1994
			JP	4085251 A	18-03-1992
			JP	6000608 B	05-01-1994
			AU	626224 B2	23-07-1992
			AU	8011391 A	30-01-1992
			CA	2046199 A1	26-01-1992
			GB	2247670 A , B	11-03-1992
			KR	9411001 B1	22-11-1994